


Slide 1 - Slide 1

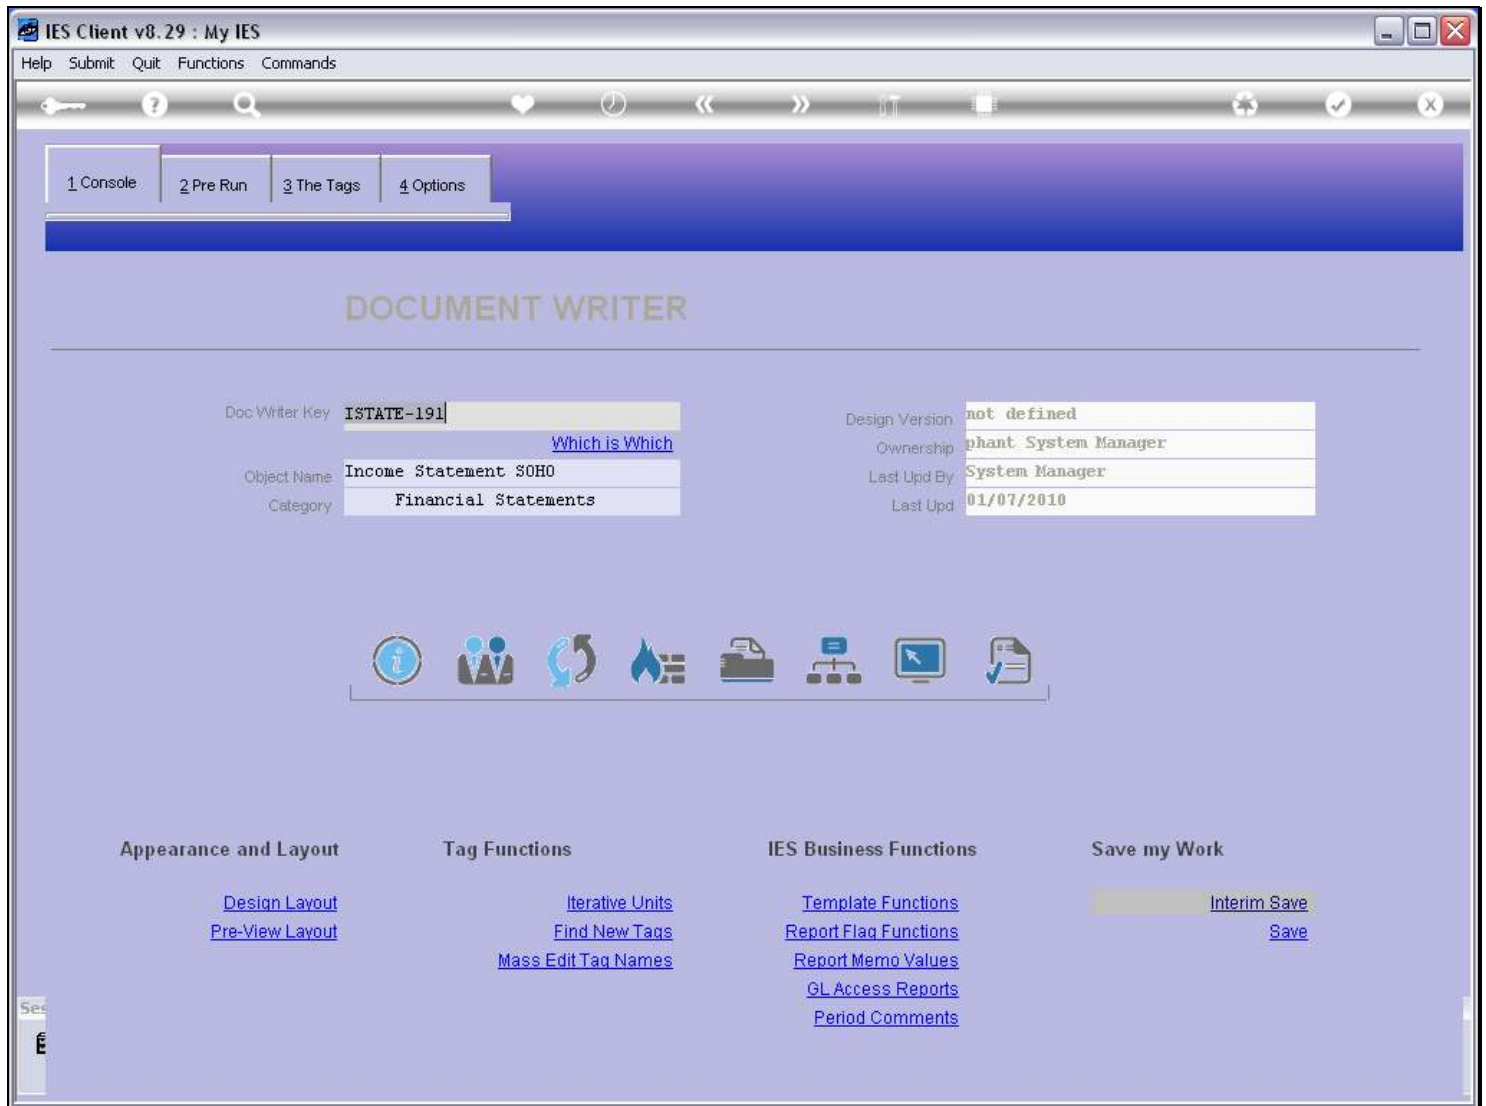


Slide notes

When a Pre Run Process is used with a Report, it is most commonly specified using the 'Pre Run Assist' function.

Slide 2 - Slide 2

The screenshot shows the IES Client v8.29: My IES interface. The top menu bar includes Help, Submit, Quit, Functions, and Commands. Below the menu is a toolbar with icons for key, help, search, heart, clock, left arrow, right arrow, list, document, refresh, checkmark, and close. The main window has a tabbed interface with four tabs: 1 Console, 2 Pre Run (selected), 3 The Tags, and 4 Options.

PRE RUN PARAMETERS: -

[Pre Run Assist](#) 

Pre Run Process:


Results File:

Results Key:

Proceed on Field #:

Conditional Value:

DIRECT REFERENCE DATA SOURCES: -



Data Sources	Data Keys
1 docwritespre	port key

Slide notes

However, it can also be done manually. The Pre Run Process we specify must be listed in the Process Library and must be flagged there as a Pre Run Process for DocWriter.

Slide 3 - Slide 3

The screenshot shows the IES Client v8.29: My IES window. The top menu bar includes Help, Submit, Quit, Functions, and Commands. Below the menu is a toolbar with icons for key, help, search, heart, clock, left arrow, right arrow, list, document, refresh, checkmark, and close. A tabbed interface at the top shows four tabs: 1 Console, 2 Pre Run (selected), 3 The Tags, and 4 Options. The main content area is titled 'PRE RUN PARAMETERS: -' and includes a 'Pre Run Assist' link and a help icon. The parameters are as follows:

Pre Run Process	docwritespre-lyear
Results File	docwritespre
Results Key	*user
Proceed on Field #	10
Conditional Value	Y

Below this is the 'DIRECT REFERENCE DATA SOURCES: -' section, which includes a table with two columns: Data Sources and Data Keys.

Data Sources	Data Keys
1 docwritespre	port key

Slide notes

The Pre Run is usually a Screen, but whatever kind of process it is, it should write results to a Results File, from where the User Choices are available to DocWriter. This File is most often DOCWRITESPRE, which exists for this very purpose. But it is also allowed that we use a different File.

Slide 4 - Slide 4

The screenshot shows the IES Client v8.29 interface. The title bar reads "IES Client v8.29 : My IES". The menu bar includes "Help", "Submit", "Quit", "Functions", and "Commands". The toolbar contains icons for key, help, search, heart, clock, left arrow, right arrow, list, document, refresh, checkmark, and close. The main window has a tabbed interface with four tabs: "1 Console", "2 Pre Run" (selected), "3 The Tags", and "4 Options".


Under the "2 Pre Run" tab, the "PRE RUN PARAMETERS: -" section is visible. It includes a "Pre Run Process" field with the value "docwritespre-1year Pre Run: 1 Year", a "Results File" field with "docwritespre", a "Results Key" field with "*user", a "Proceed on Field #" field with "10", and a "Conditional Value" field with "Y". A "Pre Run Assist" link and a help icon are also present.

Below this, the "DIRECT REFERENCE DATA SOURCES: -" section contains a table with two columns: "Data Sources" and "Data Keys". The table has one row with the values "1 docwritespre" and "port key". A vertical scrollbar is on the right side of the table.

	Data Sources	Data Keys
1	docwritespre	port key

Slide notes

Slide 5 - Slide 5

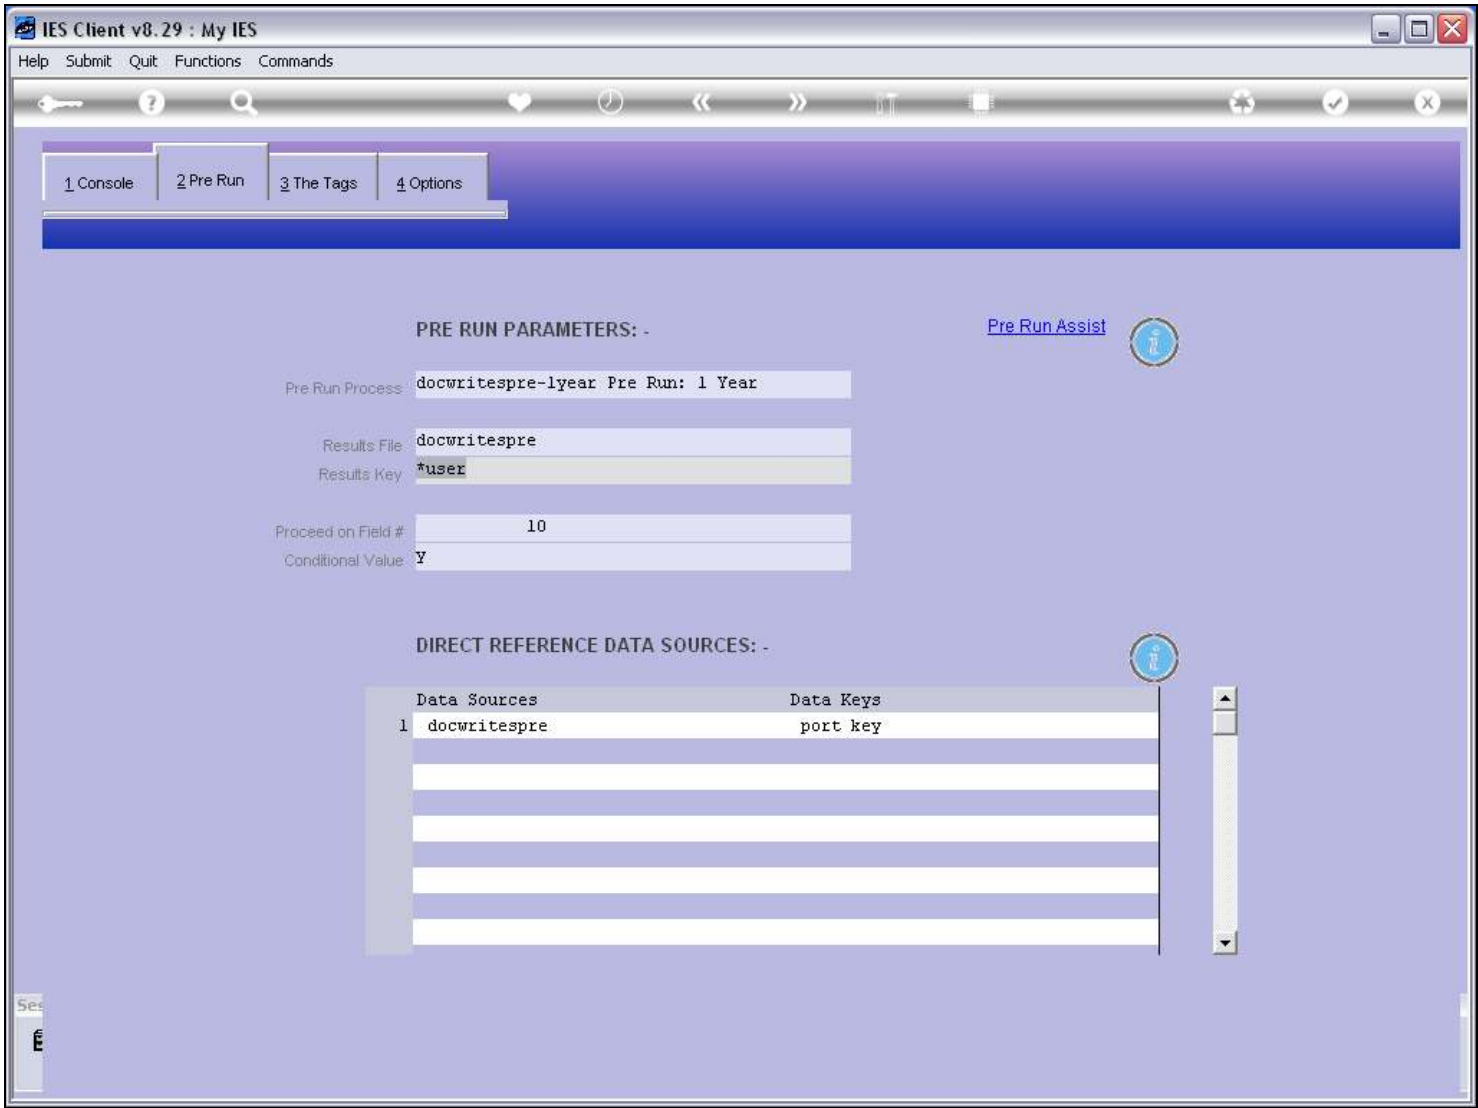

Slide notes

The result will usually be written on the User or Port Code, to avoid any potential record clashes in a multi-user environment.

Slide 6 - Slide 6


The screenshot shows the IES Client v8.29 interface. The title bar reads "IES Client v8.29 : My IES". The menu bar includes "Help", "Submit", "Quit", "Functions", and "Commands". The toolbar contains icons for a key, help, search, heart, clock, left arrow, right arrow, list, document, refresh, checkmark, and close. The main window has a tabbed interface with four tabs: "1 Console", "2 Pre Run" (selected), "3 The Tags", and "4 Options".

Below the tabs, the "PRE RUN PARAMETERS: -" section is visible. It includes a "Pre Run Process" field with the value "docwritespre-1year Pre Run: 1 Year", a "Results File" field with "docwritespre", a "Results Key" field with "*user", a "Proceed on Field #" field with "10", and a "Conditional Value" field with "Y". A "Pre Run Assist" link and a help icon are also present.

Below this, the "DIRECT REFERENCE DATA SOURCES: -" section contains a table with two columns: "Data Sources" and "Data Keys". The table has one row with the values "1 docwritespre" and "port key". A vertical scrollbar is on the right side of the table.

	Data Sources	Data Keys
1	docwritespre	port key

Slide notes

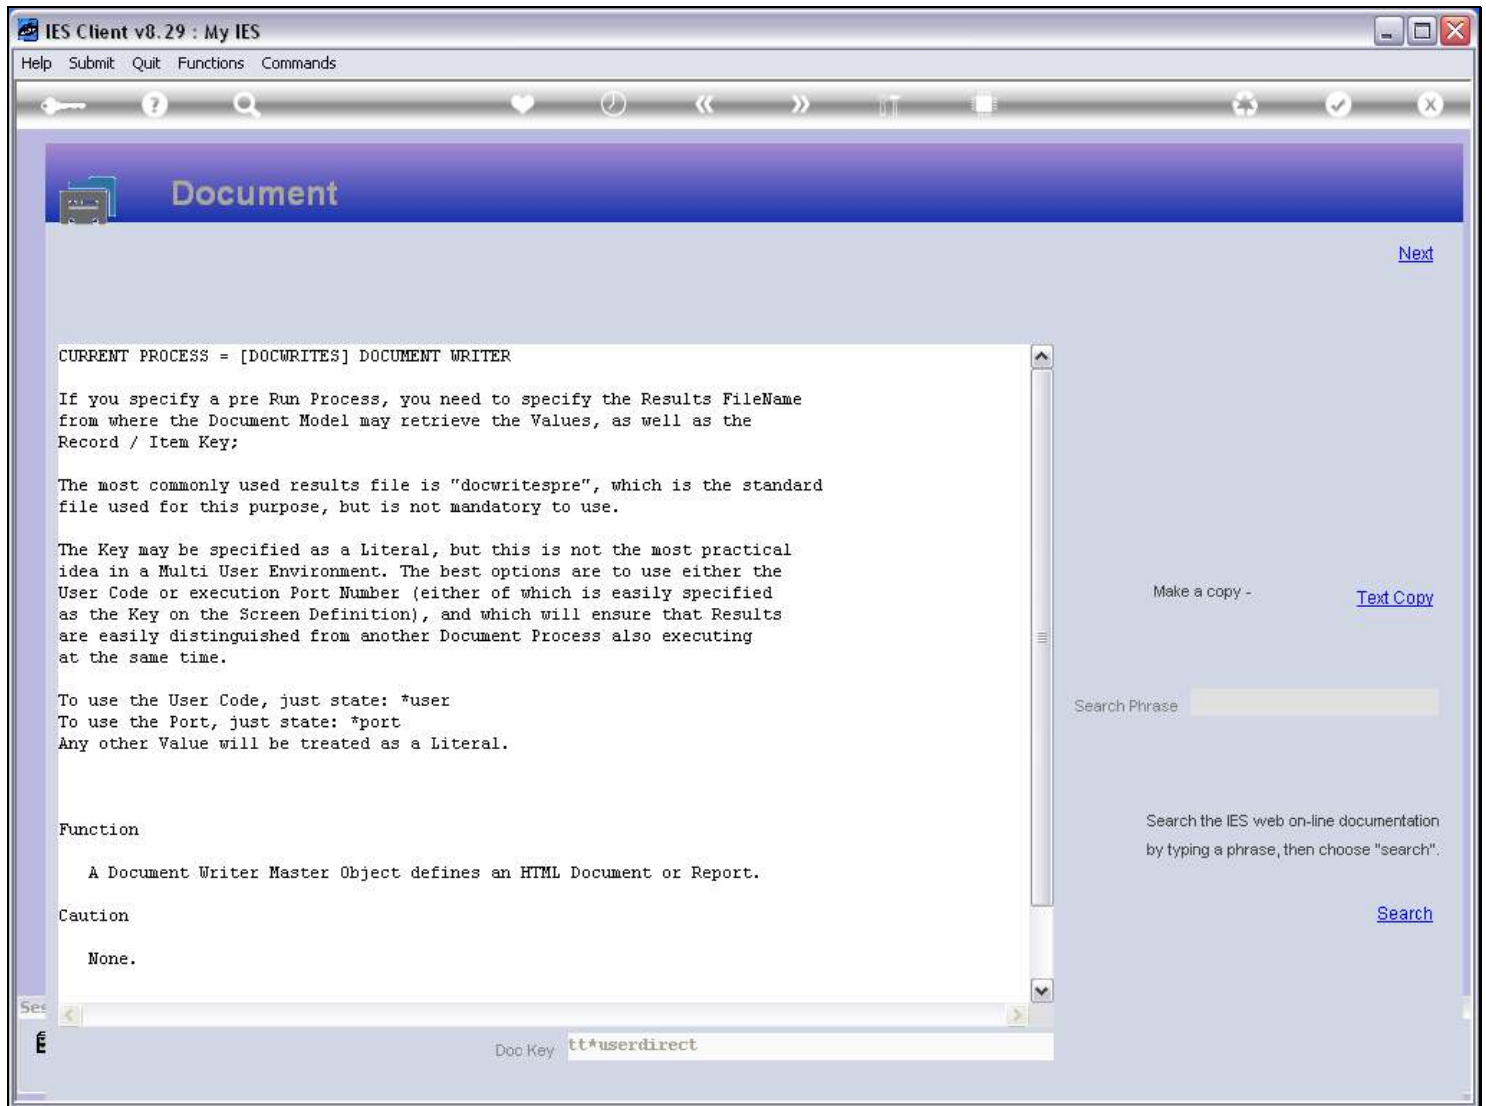Slide 7 - Slide 7**Slide notes**

The Help explains about this.

Slide 8 - Slide 8

The screenshot shows the IES Client v8.29 interface. The title bar reads "IES Client v8.29 : My IES". The menu bar includes "Help", "Submit", "Quit", "Functions", and "Commands". The toolbar contains icons for a key, help, search, heart, clock, left arrow, right arrow, list, document, refresh, checkmark, and close. The main window has a tabbed interface with four tabs: "1 Console", "2 Pre Run" (selected), "3 The Tags", and "4 Options".

Below the tabs, the "PRE RUN PARAMETERS: -" section is visible. It includes a "Pre Run Process" field with the value "docwritespre-1year Pre Run: 1 Year", a "Results File" field with "docwritespre", a "Results Key" field with "*user", a "Proceed on Field #" field with "10", and a "Conditional Value" field with "Y". A "Pre Run Assist" link and a help icon are also present.

The "DIRECT REFERENCE DATA SOURCES: -" section features a table with two columns: "Data Sources" and "Data Keys". The table contains one row with the values "1 docwritespre" and "port key". A vertical scrollbar is located to the right of the table.

	Data Sources	Data Keys
1	docwritespre	port key

Slide notes

Slide 9 - Slide 9

The screenshot shows the IES Client v8.29: My IES interface. The top menu bar includes Help, Submit, Quit, Functions, and Commands. Below the menu is a toolbar with icons for key, help, search, heart, clock, left arrow, right arrow, list, document, refresh, checkmark, and close. The main window has a tabbed interface with four tabs: 1 Console, 2 Pre Run (selected), 3 The Tags, and 4 Options. The Pre Run Parameters section includes a Pre Run Process field with the value 'docwritespre-1year Pre Run: 1 Year', a Results File field with 'docwritespre', a Results Key field with '*user', a Proceed on Field # field with '10', and a Conditional Value field with 'Y'. There is a 'Pre Run Assist' link and a help icon. The Direct Reference Data Sources section shows a table with two columns: Data Sources and Data Keys. The table has one row with 'docwritespre' and 'port key'. There is a help icon and a vertical scrollbar next to the table.

PRE RUN PARAMETERS: - [Pre Run Assist](#)

Pre Run Process: docwritespre-1year Pre Run: 1 Year

Results File: docwritespre

Results Key: *user

Proceed on Field #: 10

Conditional Value: Y


DIRECT REFERENCE DATA SOURCES: -

Data Sources	Data Keys
1 docwritespre	port key

Slide notes


Optionally, we can have a 'conditional proceed' for the Report, dependent on whether the User completes the Pre Run process or not. In this case, we will also fill the 'proceed on field' number, and state a conditional value to check on that field.

Slide 10 - Slide 10

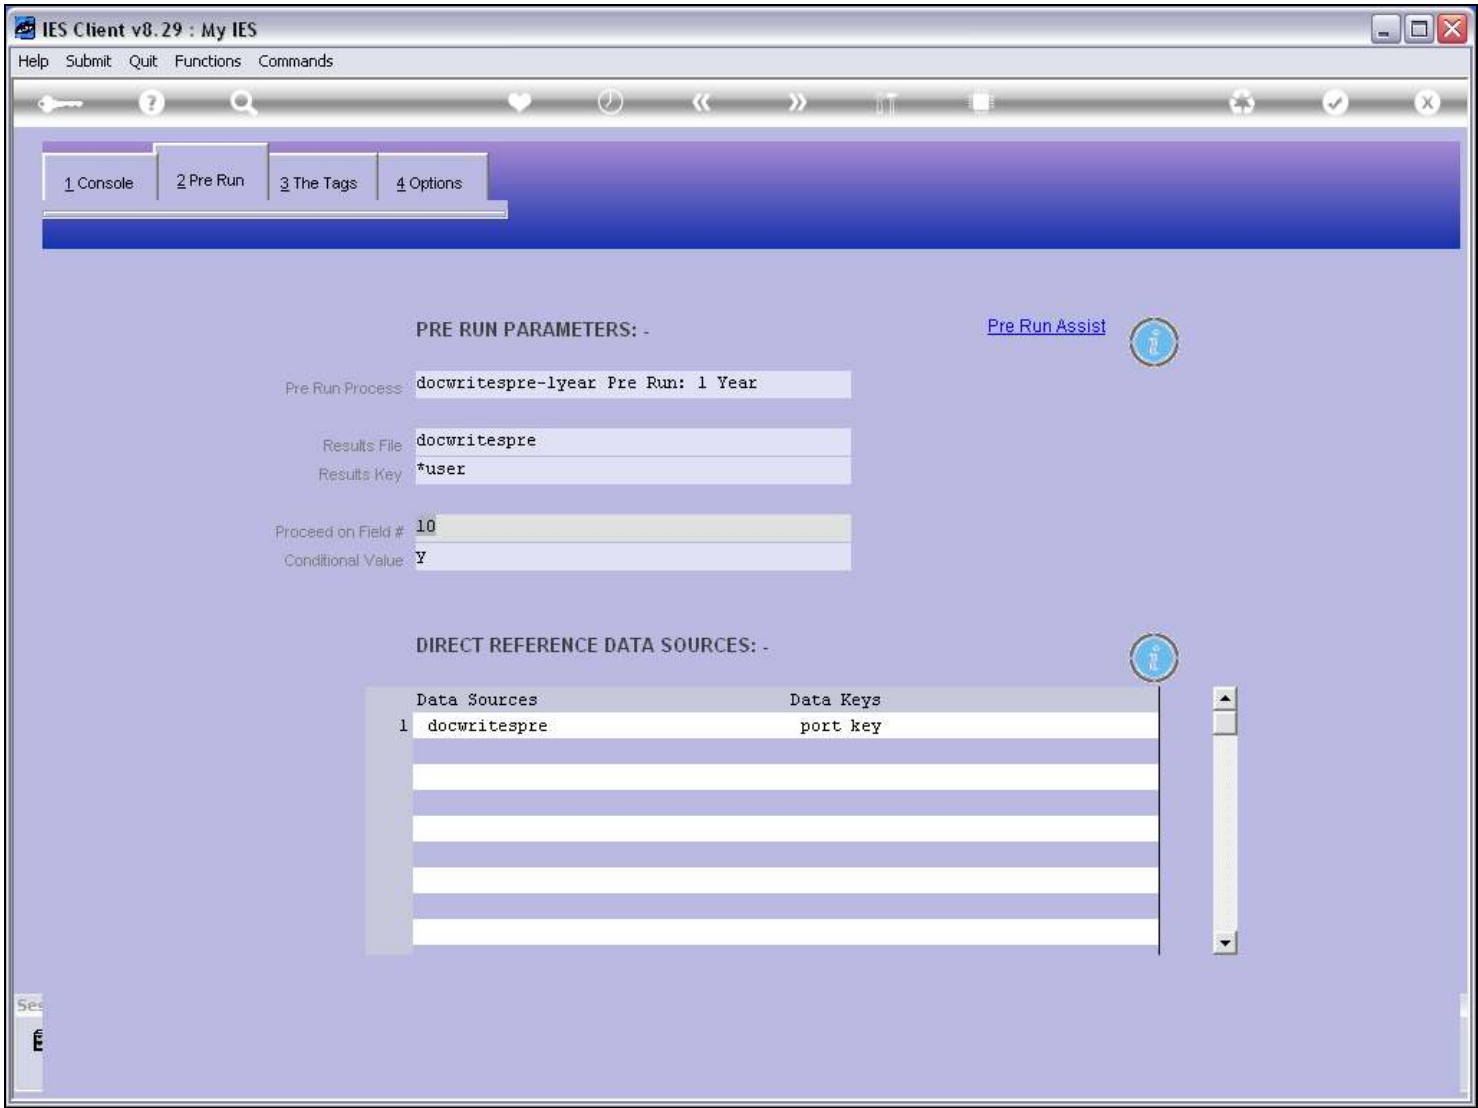

Slide notes

Slide 11 - Slide 11

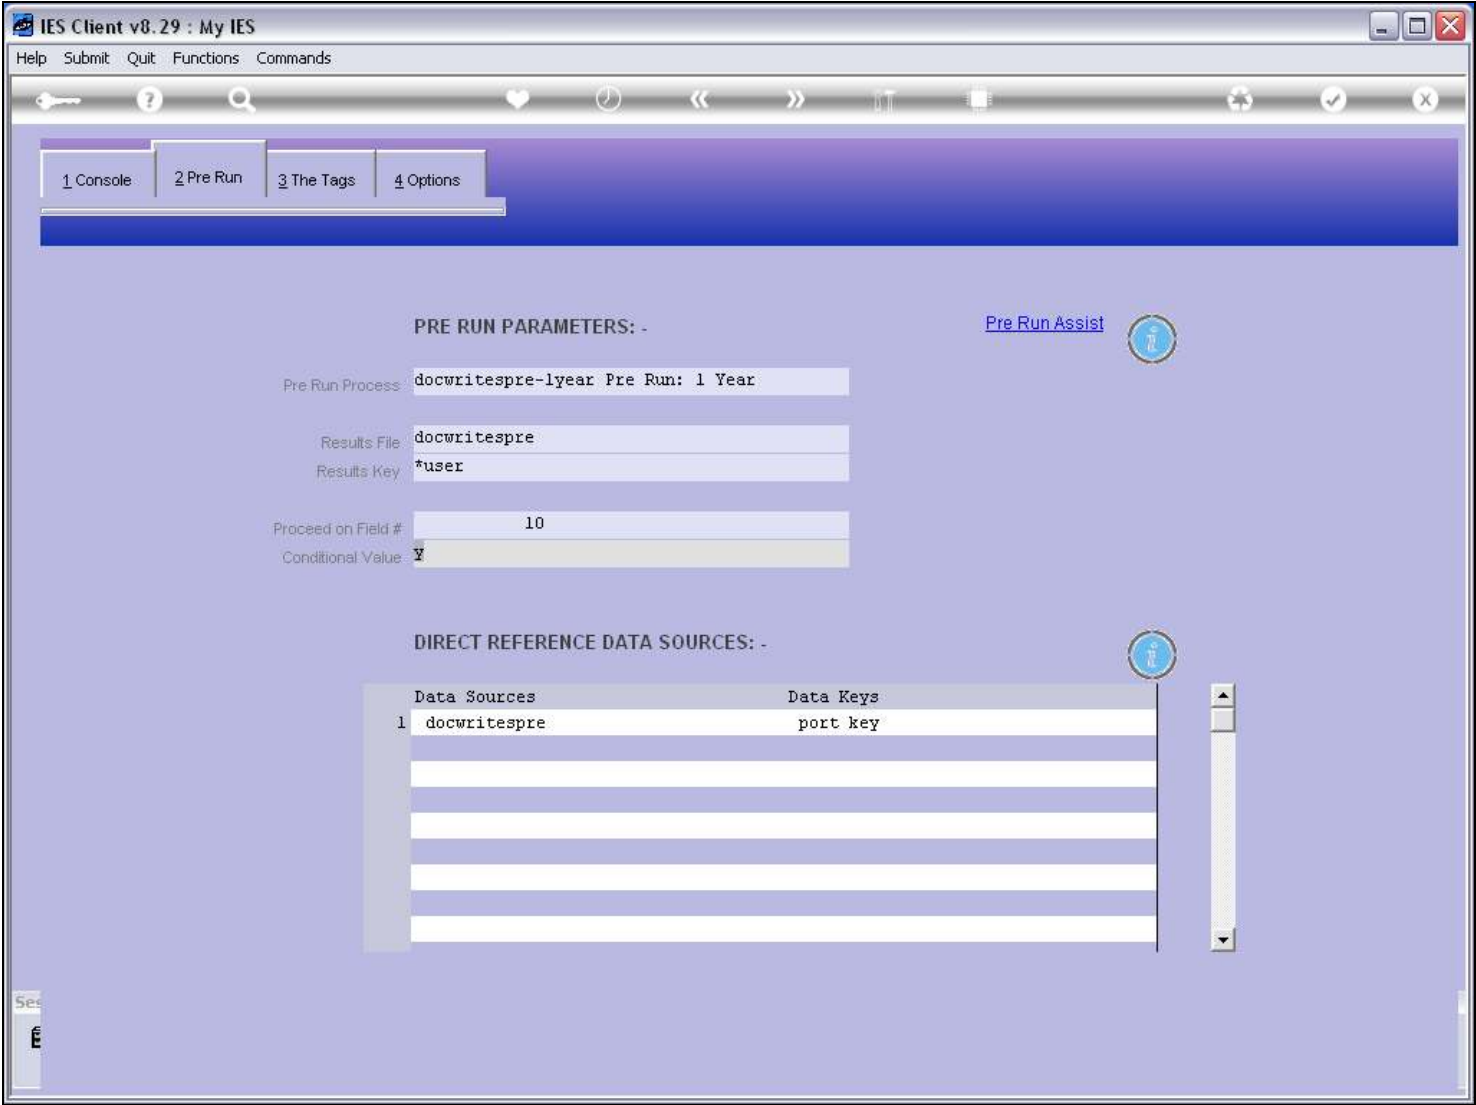

Slide notes